

Declaration of Performance  
Soudal Fix ALL High Tack Clear

Unique identification code of the product type:  
Soudal Fix ALL High Tack Clear

Intended use or uses of the construction product:  
Sealant for facade for interior.

Construction product in accordance with applicable harmonized specifications:  
EN 15651-1:2012: Type F -INT


System or systems of assessment and verification of consistency of performance of the construction product, as set out in Annex V:  
System 4: for essential characteristics  
System 3: for reaction to fire

Name and contact address of the manufacturer as required pursuant to Article 11(5):  
Soudal NV, Everdongenlaan 18-20, 2300 Turnhout, Belgium

The notified body:  
IFT Rosenheim GmbH, NB 0757 has carried out Determination of the Product Type under system 3, for reaction to fire



**ROCK STAR CONSTRUCT SRL**  
Aleea Teisani nr137A Sector 1 Bucuresti  
RO 22680005 | J40/20648/2007  
RO79 BTRL 0500 1202 8671 45XX  
BANCA TRANSILVANIA OTOPENI  
office@piatraonline.ro www.piatraonline.ro

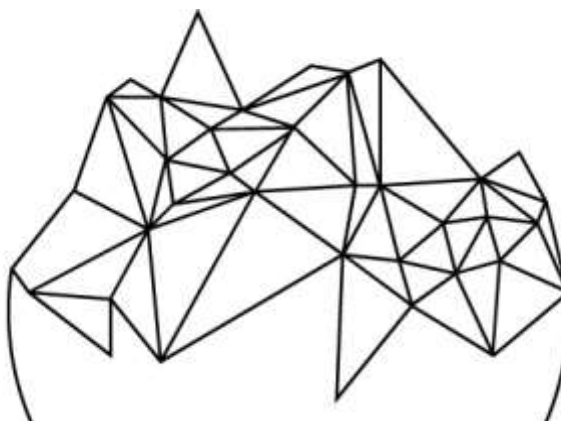

Declaration of Performance  
Soudal Fix ALL High Tack

Declared Performance: EN 15651-1:2012

Essential characteristics	Performance	Harmonized technical specification
Reaction to fire	Class E	EN 15651-1: 2012
Release dangerous chemicals	NPD	
Water and air tightness		
Resistance to flow	$\leq 3 \text{ mm}$	
Loss of volume	$\leq 10 \%$	
Elongation at break	$\geq 25\%$	
Durability	Pass	

Conditioning:  
Method B

Test substrate:  
Aluminum  
Mortar

The performance of this product is in conformity with the declared performance. This declaration of performance is issued under the sole responsibility of the manufacturer.


Signed for on behalf of the manufacturer by



Ing. W. Dierckx  
Technical Product Manager  
BE-2300 Turnhout, 11/01/2017



**ROCK STAR CONSTRUCT SRL**  
Aleea Teisani nr137A Sector 1 Bucuresti  
RO 22680005 | J40/20648/2007  
RO79 BTRL 0500 1202 8671 45XX  
BANCA TRANSILVANIA OTOPENI  
office@piatraonline.ro www.piatraonline.ro

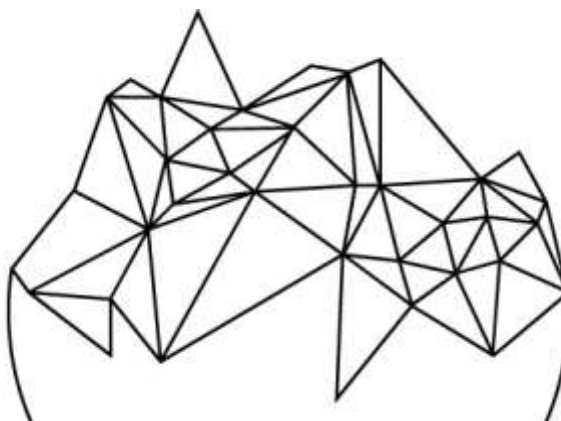

CE Marking

NB 1173

Soudal NV, Everdongenlaan 18-20, 2300 Turnhout, Belgium

16

Reference no. DOP: 231282

EN 15651-1: 2012

Sealant for facade for interior application.


Soudal Fix ALL High Tack Clear

EN 15651-1:2012: Type F -INT

Conditioning:  
Method B

Test substrate:  
Aluminum  
Mortar

Essential characteristics	Performance	Harmonized technical specification
Reaction to fire	Class E	EN 15651-1: 2012
Release dangerous chemicals	NPD	
Water and air tightness		
Resistance to flow	$\leq 3$ mm	
Loss of volume	$\leq 45$ %	
Elongation at break	$\geq 25$ %	
Durability	Pass	

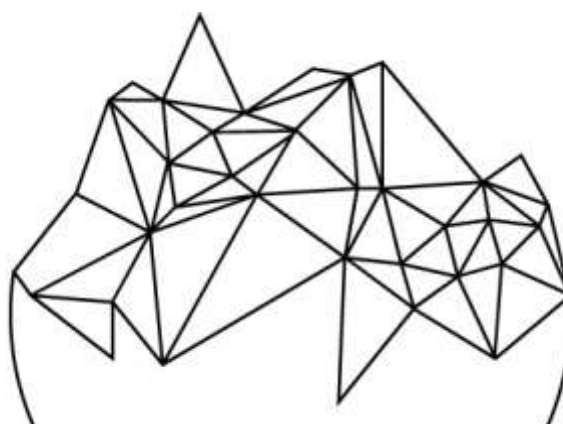

**ROCK STAR CONSTRUCT SRL**  
 Aleea Teisani nr137A Sector 1 Bucuresti  
 RO 22680005 | J40/20648/2007  
 RO79 BTRL 0500 1202 8671 45XX  
 BANCA TRANSILVANIA OTOPENI  
 office@piatraonline.ro www.piatraonline.ro