


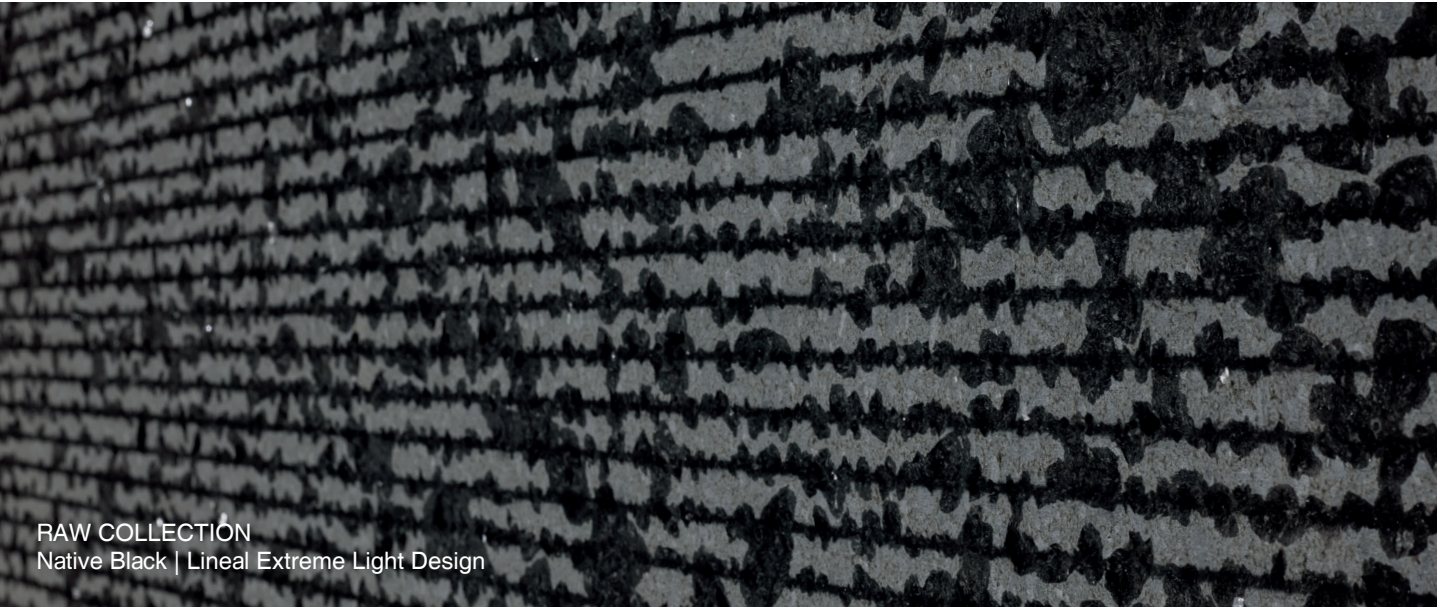

RAW COLLECTION
Native Black | Lineal Extreme Light Design


Native Black | *Granite*

Test	Std.	Unit	Ave. Value	Condition
Dry Density	EN 1936	(gr/cm3)	2.62	-
Saturated Density	EN 1936	(gr/cm3)	2.63	-
Porosity	EN 1936	(%)	0.45	-
Specific Gravity	EN 1936	(Kg/m3)	2.64	-
Water Absorption Under Atmosphere Pressure	EN 13755	(%)	0.17	-
Thermal Expansion Coefficient	EN 14581	10 ⁻⁶ C ⁻¹	6.07	-
Capillary Water Absorption	EN 1925	(Kg/m2)	0.59	-
Compressive Strength	EN 1926	(MPa)	119.70	Dry
Tensile Strength	ISRM 1981	(MPa)	8.94	Dry
Flexural Strength	EN 12372	(MPa)	22.71	Dry
Resistance to Salt Crystallization	EN 12370	(Mass loss %)	-0.46	After 48 Cycles
Resistance to Freeze-Thaw	EN 12371	(Mass loss %)	-0.28	After 48 Cycles
Resistance to Acid (H2SO4)	EN 13919	(Mass loss %)	-0.21	After 48 Cycles
Thermal Shock	EN 14066	(Mass loss %)	-0.11	After 48 Cycles

Details

- Formats Available | Slabs
- Thickness Available | 2cm, 3cm
- Available Designs | Hydro, Lineal Extreme Dark, Lineal Extreme Light, Microdot, Velvet
- Applications | Interior and Exterior Wall Cladding

Designs

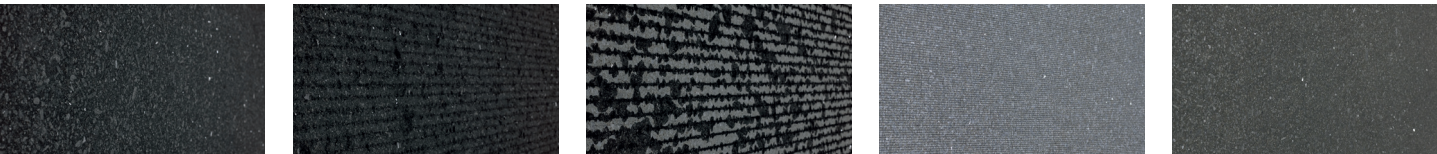

Hydro Design Lineal Extreme Dark Design Lineal Extreme Light Design Microdot Design Velvet Design