


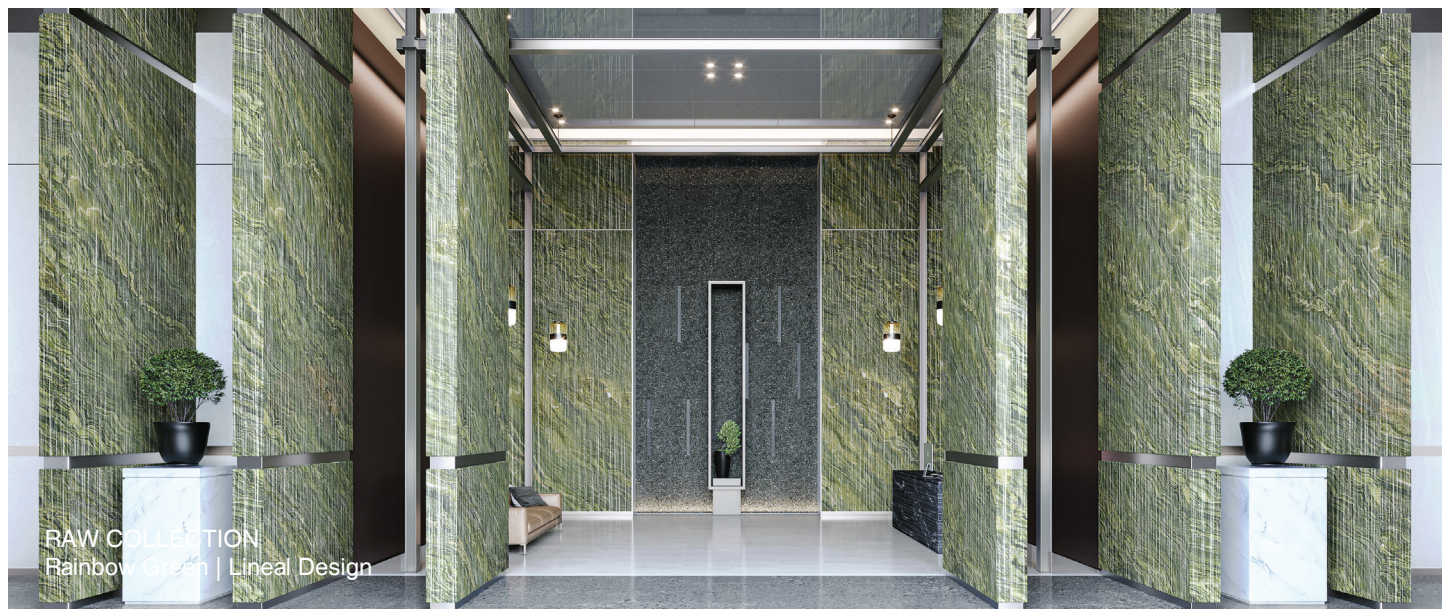

RAW COLLECTION
Rainbow Green | Lineal Design

Rainbow Green | *Granite*

Test	Std.	Unit	Ave. Value	Condition
Dry Density	EN 1936	(gr/cm3)	2.99	-
Saturated Density	EN 1936	(gr/cm3)	3.00	-
Porosity	EN 1936	(%)	0.59	-
Specific Gravity	EN 1936	(Kg/m3)	3.01	-
Water Absorption Under Atmosphere Pressure	EN 13755	(%)	0.19	-
Capillary Water Absorption	EN 1925	(Kg/m2)	0.45	-
Compressive Strength	EN 1926	(MPa)	57.79	Dry
Tensile Strength	ISRM 1981	(MPa)	8.65	Dry
Flexural Strength	EN 12372	(MPa)	3.63	Dry
Resistance to Salt Crystallization	EN 12370	(Mass loss %)	-1.73	After 48 Cycles
Resistance to Freeze-Thaw	EN 12371	(Mass loss %)	-0.01	After 48 Cycles
Resistance to Acid (H2SO4)	EN 13919	(Mass loss %)	-0.11	After 48 Cycles
Thermal Shock	EN 14066	(Mass loss %)	-0.006	After 48 Cycles

Details

Formats Available | Slabs

Thickness Available | 2cm

Available Designs | Lineal, Microdot, Velvet

Applications | Interior and Exterior Wall Cladding


Designs



Lineal Design



Microdot Design



Velvet Design